

technotrans


power to transform

spray.xact easy

spray lubrication for small applications



spray lubrication without compressed air

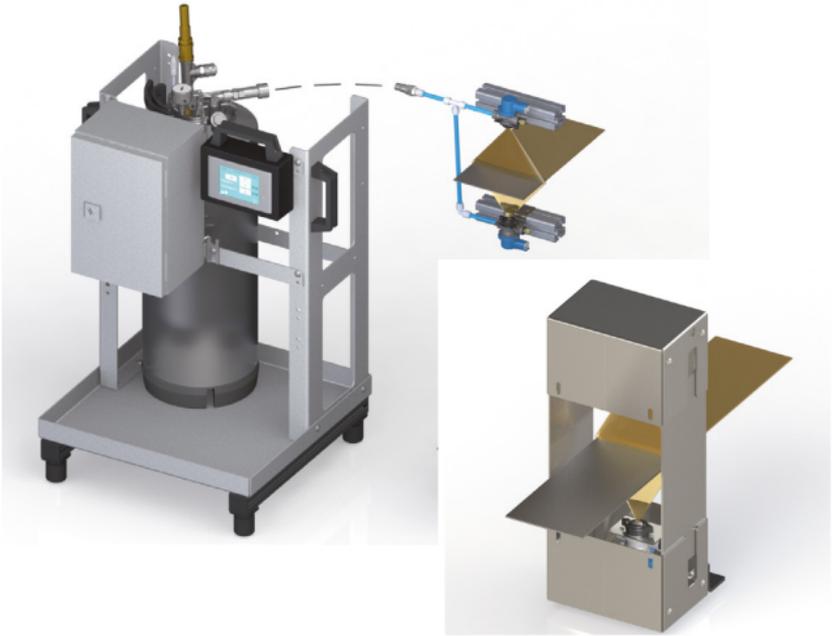

The advantages at a glance:

- up to 12 nozzles (unheated) for low-viscosity media
- up to 12 nozzles (heated) for viscous media
- spray width per nozzle: 100 or 200 mm
- low oil mist
- simple installation and operation
- numerous options such as frames and covers

technotrans SE

Robert-Linnemann-Straße 17 · 48336 Sassenberg · Germany

T +49 (0)2583 301-1000 · F +49 (0)2583 301-1030

info@technotrans.com · www.technotrans.com